




Part Number Reference Guide


2018

CABLE ASSEMBLIES

XLR & DMX Cables

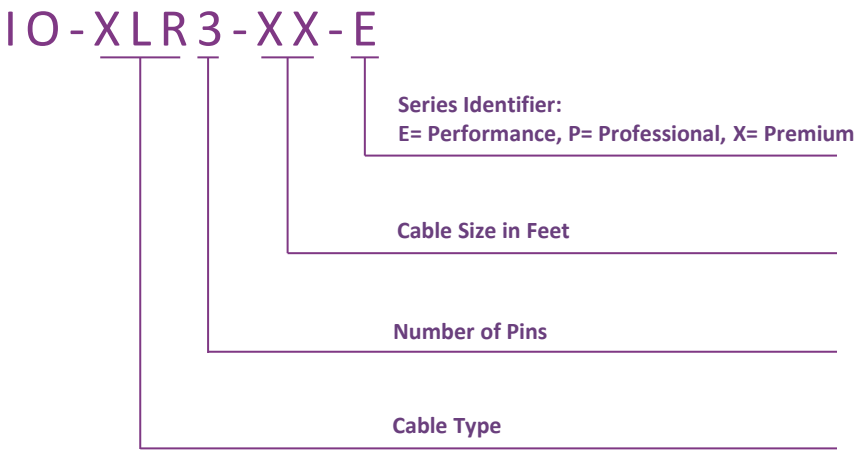


Instrument & Patch Cables

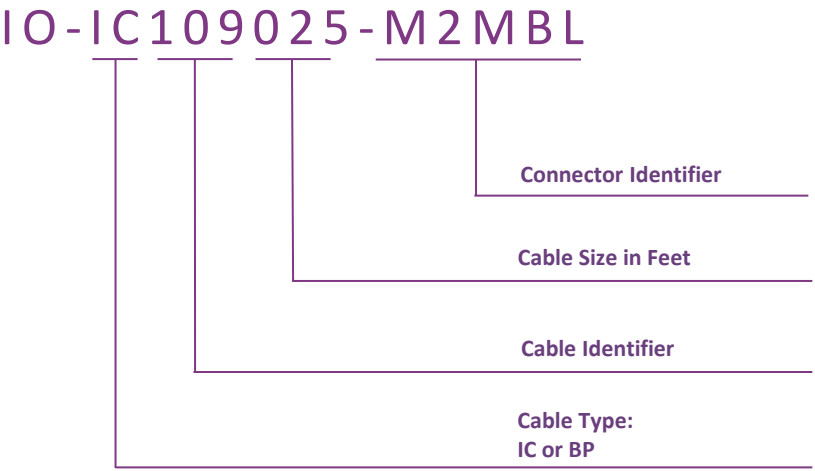


* Cables with right angle connectors are designated by “-R” for one right angle connector, and a “-2R” for 2 right angle connectors.

Network Cables

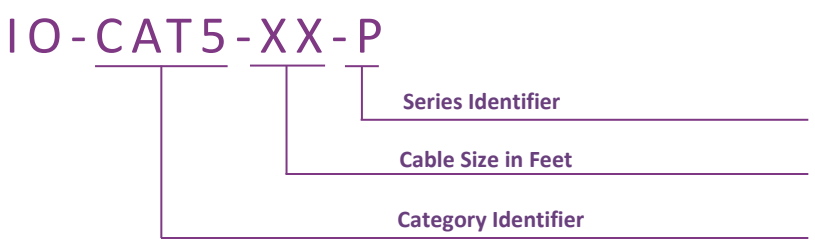

Power Cables

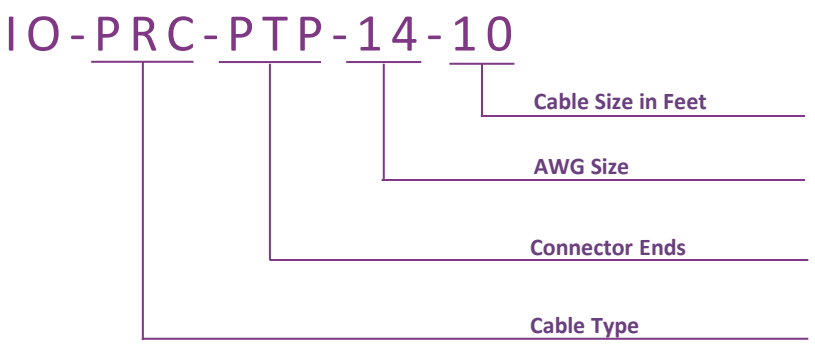

BULK WIRE

Audio & Control

IO-D22428-500SP

D for Data, A for Audio

2 for 2 Twisted Pairs

AWG Size

1 for Spiraled Shield, 2 for Braided Shield

Outer Diameter

Length in Feet

SP = Spool

IO-E4261S-5ECMR-1000B

E for Ethernet

4 Twisted Pairs

AWG Size

1 for Solid or 2 for Stranded

S = Shielded

5e = CAT 5e Cable, 6 = CAT 6 Cable

CMR = Riser Rated, P = Plenum Rated


Length in Feet

SP = Spool or B = Box


Network

CONNECTORS


XLR Connectors

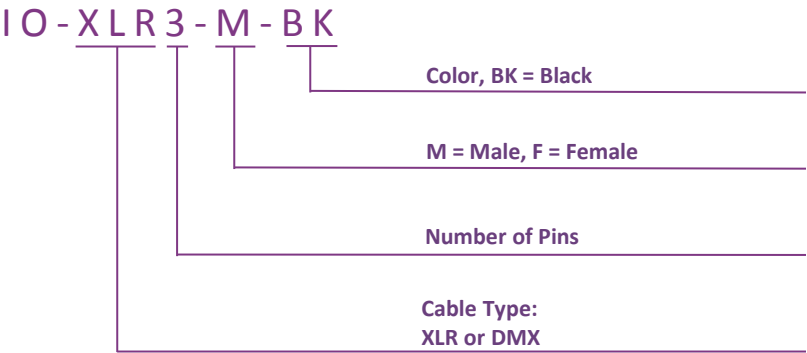

TRS & TS Connectors 1/4" Connectors

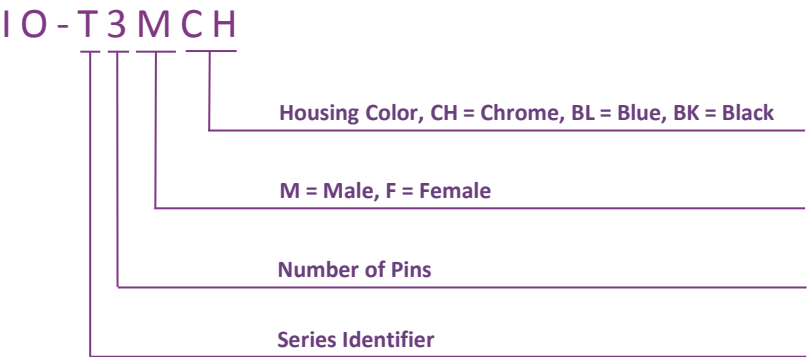

Ethernet Connectors

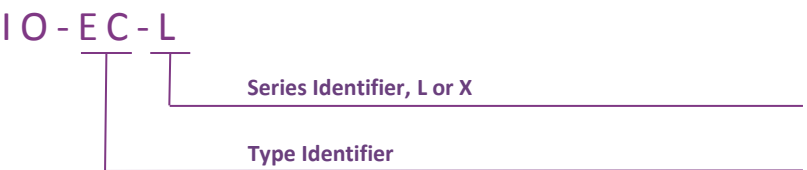

Power Connectors

